

Copyright © 2019 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

PART NO. 52-947BK

LEFT SIDE BEVERAGE HOLDER

REVISED 5/4/2021

FITMENT:

HONDA GOLDWING/GOLDWING TOUR DCT 2018-NEWER

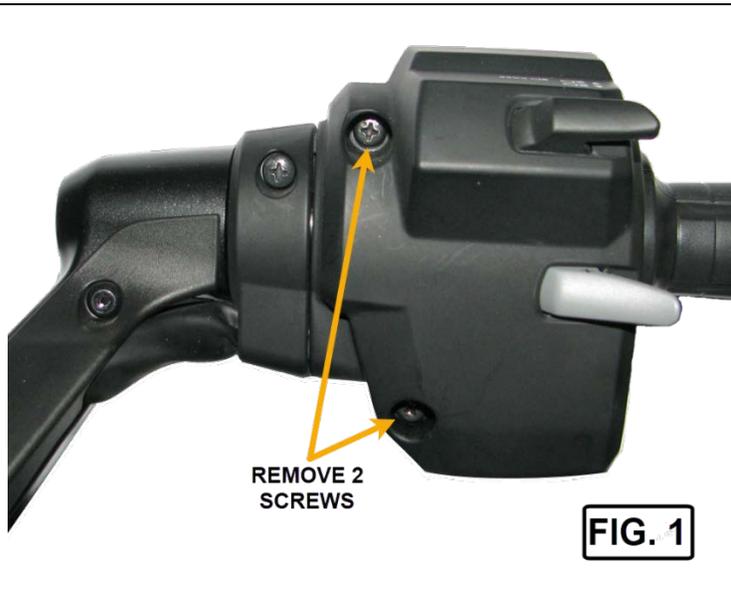
TOOLS NEEDED: 2MM ALLEN WRENCH

PHILLIPS SCREWDRIVER

REMOVABLE THREAD LOCK

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.**ESTIMATED INSTALLATION TIME: 10 TO 15 MIN.****INSTALLATION:**

1. USING PHILLIPS SCREWDRIVER, REMOVE THE TWO SCREWS ON THE FRONT OF THE LEFT HANDLEBAR CONTROL AS SHOWN IN FIG. 1. THESE WILL NOT BE REUSED.
2. APPLY THREAD LOCK NEAR THE END OF THE M5 SCREWS SUPPLIED WITH THE MOUNT.
3. ASSEMBLE THE M5 SCREWS AND SPACERS AS SHOWN IN FIG. 2.
4. USING A PHILLIPS SCREWDRIVER, INSTALL THE SCREWS INTO THE LEFT HANDLEBAR CONTROL AS SHOWN IN FIG. 3 AND TIGHTEN. *NOTE: OVER TIGHTENING CAN CAUSE DAMAGE TO THE INSERTS IN THE FRONT HALF OF THE SWITCH BLOCK.*
5. SLIDE THE BEVERAGE HOLDER INTO THE MOUNT AND INSTALL THE M3 SCREW AS SHOWN IN FIG. 4.
6. LET THREAD LOCK CURE FOR 24 HOURS BEFORE USING CUP HOLDER.

**FIG. 2**