

BIG BIKE PARTS®

Copyright© 2022 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

INSTALLATION INSTRUCTIONS

PART NO. 41-420/41-420RED/
41-420G

PASSENGER BACKREST
GRANDE PASSENGER BACKREST

4/6/2023

ESTIMATED INSTALLATION TIME: 15 TO 30 MIN.





FITMENT: CAN-AM RYKER 2019-NEWER W/ MAX MOUNT & PASSENGER SEAT

TOOLS NEEDED:	T20 TORX	PHILLIPS SCREWDRIVER	5MM ALLEN WRENCH	7/16" WRENCH	4MM ALLEN WRENCH
	3MM ALLEN WRENCH	REMOVABLE THREAD LOCK			

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING. *USE REMOVABLE THREAD LOCK ON ALL FASTENERS*

INSTALLATION:

1. IF YOU HAVE A DRIVER BACKREST INSTALLED, IT MAY NEED TO BE REMOVED (ENOUGH TO REMOVE PASSENGER SEAT) BEFORE STARTING THIS INSTALL.
2. REMOVE THE PASSENGER SEAT FROM THE MAX MOUNT BY RELEASING THE LOCKING TAB AND SLIDING THE SEAT FORWARD AND UP OFF THE MAX MOUNT. (SEE FIG. 1)
3. PLACE THE PASSENGER SEAT UPSIDE DOWN ON A CLEAN SURFACE.
4. REMOVE THE TWO SCREWS AND REAR TRIM FROM THE PASSENGER SEAT (FIG. 2). (THESE PARTS WILL NOT BE RE-USED)
5. REMOVE THE PASSENGER BACKREST MOUNT FROM THE PACKAGE AND INSTALL IT WITH THE TWO #10 X 5/8" THREAD FORMING SCREWS SUPPLIED IN THE KIT ACCORDING TO FIG. 3. (NOTE: DO NOT USE THREADLOCKER ON THESE SCREWS. DO NOT OVERTIGHTEN THE SCREWS OR IT MAY CAUSE DAMAGE TO THE PASSENGER SEAT)
6. RE-INSTALL THE PASSENGER SEAT ON THE MAX MOUNT WITH THE PASSENGER BACKREST MOUNT INSTALLED (REVERSE STEP 2).
7. INSTALL THE ADJUSTMENT PLATE TO THE PASSENGER BACKREST MOUNT ACCORDING TO FIG. 4.
8. INSTALL THE REMAINING COMPONENTS ACCORDING TO FIG. 5.

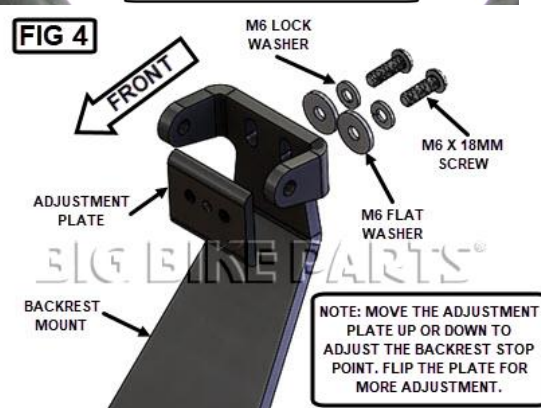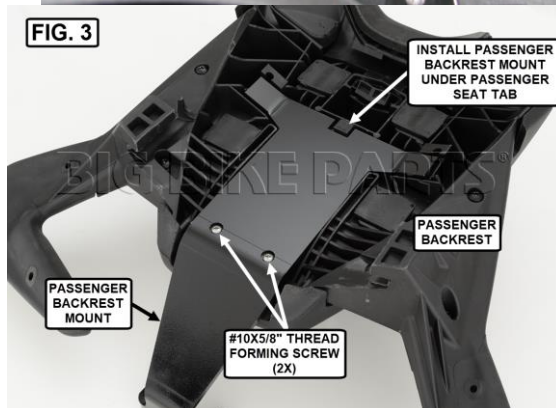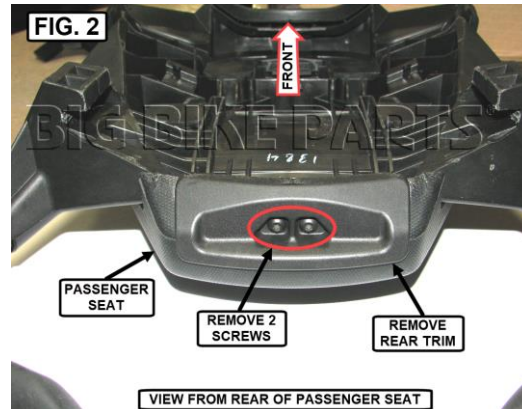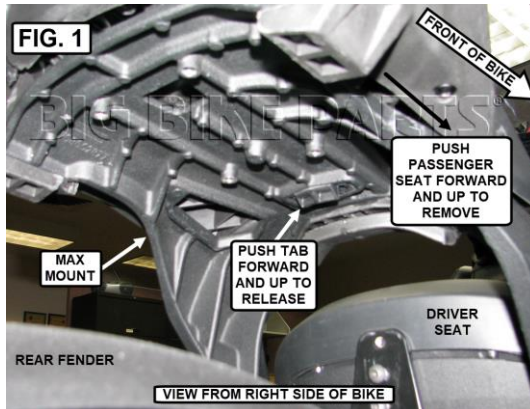

NOTICE

THIS SET CONTAINS EXTRA
HARDWARE ITEMS THAT WILL
NOT BE USED FOR THIS
INSTALLATION

WARNING

BACKREST IS DESIGNED TO SUPPORT
RIDERS LOWER BACK WHEN RIDING. DO
NOT APPLY EXCESSIVE FORCE BY PUSHING
BACK WITH YOUR FULL BODY WEIGHT. DO
NOT USE BACKREST TO LIFT OR SUPPORT
MOTORCYCLE.

WARNING

ALWAYS MAKE SURE THROTTLE ROTATES
AND RETURNS BACK TO IDLE POSITION
FREELY BEFORE OPERATING VEHICLE.
FAILURE TO DO SO CAN RESULT IN INJURY

NOTICE

IGNORING THE CONTENTS OF THESE
INSTRUCTIONS MAY AFFECT THE PRODUCT
PERFORMANCE AND FUNCTIONALITY. NOT
FOLLOWING THESE INSTRUCTION MAY CAUSE
DAMAGE TO THE PRODUCT OR THE VEHICLE
TO WHICH IT IS BEING ATTACHED.