



# INSTALLATION INSTRUCTIONS

## Embark on Your Journey with Confidence.

These instructions are for both riders and dealers – written as a step-by-step guide with an eye for detail, just like our products. It's all part of your experience with Show Chrome, and we take that seriously.

Please review the instructions before diving in, and if things get uncomfortable, don't hesitate. Reach out to us. We're here to help and offer direct, human customer service based in Rice Lake, WI, USA – every time at 888-244-2453. Ride safely, and ride often.

Scan the QR code to discover the product:



Final Product:

52-973 INSTALLED SHOWN






52-973BK INSTALLED SHOWN





<b>Product: FOLDING FLAG POLE</b>					
<b>Part # 52-973/52-973BK</b>					
<b>INSTALLATION TIME: 20 TO 40 MIN</b>			<b>Fitment: HONDA GOLD WING TOUR 2021 +</b>		
<b>TOOLS NEEDED:</b>	RUBBING ALCOHOL	CLEAN LINT FREE RAG	DRILL	1/4" DRILL BIT	4MM ALLEN WRENCH
	REMOVABLE THREAD LOCK	MASKING TAPE	PENCIL	5MM ALLEN WRENCH	
<b>INCLUDED:</b>	FLAG MOUNT	FOLDING FLAG POLE	FLAG POLE CAP	FLAT BRACKET	M6 SCREWS (2X)
	M8-1.25X20MM SCREW				

## INSTRUCTIONS

1. Open the trunk lid.
2. Starting on the right side of the bike, remove the five (5) screws shown in **FIG. 1**.
3. Remove the three (3) push pins shown in **FIG. 1** by pressing the center in and pulling the push pin out.
4. Remove the push pin shown in **FIG. 2** by pressing the center in and pulling the push pin out.
5. Remove the trunk side panel by sliding it straight back towards the rear of the bike and out. Set on a clean surface or towel.
6. Place a piece of MASKING TAPE on the trunk side panel as shown in **FIG. 3**.
7. Mark the location of the two holes according to **FIG. 3**.
  - **NOTE:** Be sure hole locations marked are accurately placed before drilling.
8. Using a 1/4" DRILL BIT, drill two 1/4" holes on the marks from step 7 (**FIG. 3**) through the trunk side panel.
  - **NOTE:** Show Chrome recommends using a brad point drill bit when drilling plastic to avoid damaging or breaking the plastic panels.
9. Remove the MASKING TAPE and any burs from drilling.
10. Remove the FLAG POLE components from the packaging.
11. Install the FLAG and FOLDING FLAG POLE on the FLAG POLE MOUNT (**FIG. 4**).
  - **NOTE:** Do not over torque bolt or apply excess force to the FLAG POLE pivot bolt, use removable thread lock when installing the FLAG POLE CAP as well as the M8-1.25X20MM SCREW.
  - **NOTE:** Ensure all remaining hardware is secure. If any hardware becomes loose, additional thread locker may be applied.
12. Use RUBBING ALCOHOL and a CLEAN LINT FREE RAG to clean the outside surface of the trunk where the FLAG POLE MOUNT will be installed.
  - **NOTE:** Be sure FLAG POLE folds forward parallel to the trunk when tightening.
13. From the inside of the trunk side panel, place the FLAT BRACKET in position using the two supplied M6 SCREWS (**FIG. 5**).
14. Carefully apply a small drop of REMOVABLE THREAD LOCK to each threaded hole on the FLAG POLE MOUNT.
  - **NOTE:** Be sure thread lock does not come in contact with the plastic panels or damage may occur.
15. Remove the backer from the double sided tape on the FLAG POLE MOUNT (**FIG. 6**).
  - **NOTE:** Be sure not to touch the adhesive on the double sided tape before installing the FLAG POLE MOUNT in place.
16. With both screws started in the FLAG POLE MOUNT, press the mount firmly in place against the trunk.
17. Tighten the two screws to secure.
  - **NOTE:** Do not over tighten screws or the plastic panels may crack or break.
  - **NOTE:** Tighten FLAG MOUNT UNTIL FLAG POLE has no slack when moving it back and forth.
18. Repeat steps 1 through 5 in reverse order to assemble the trunk.
19. Repeat steps 1 through 18 on left side if installing 2 FLAG POLES.

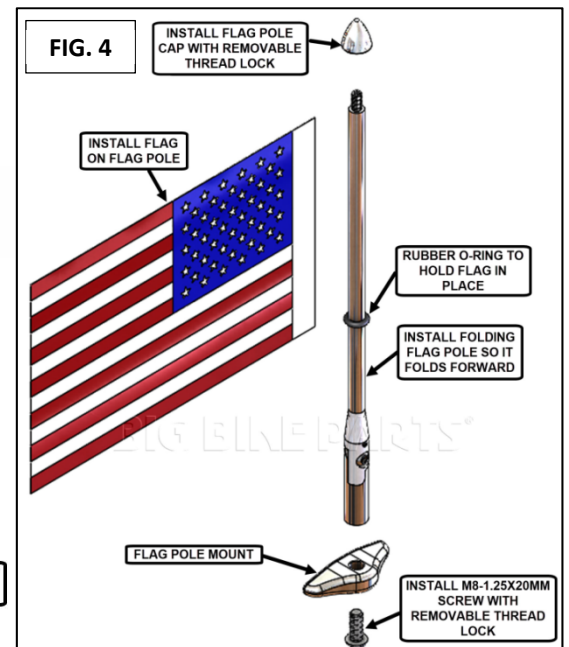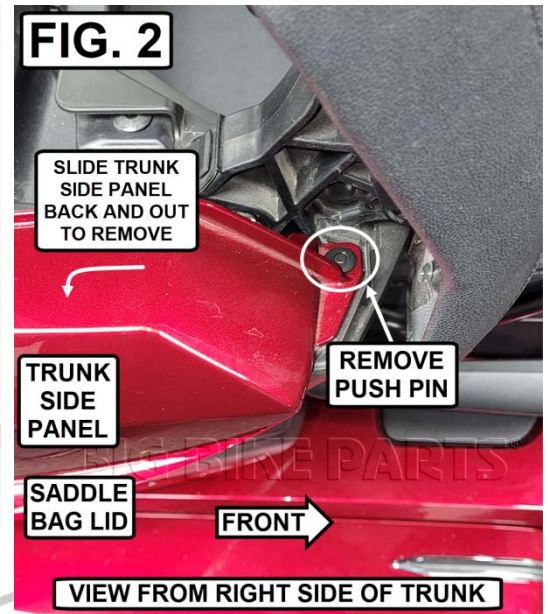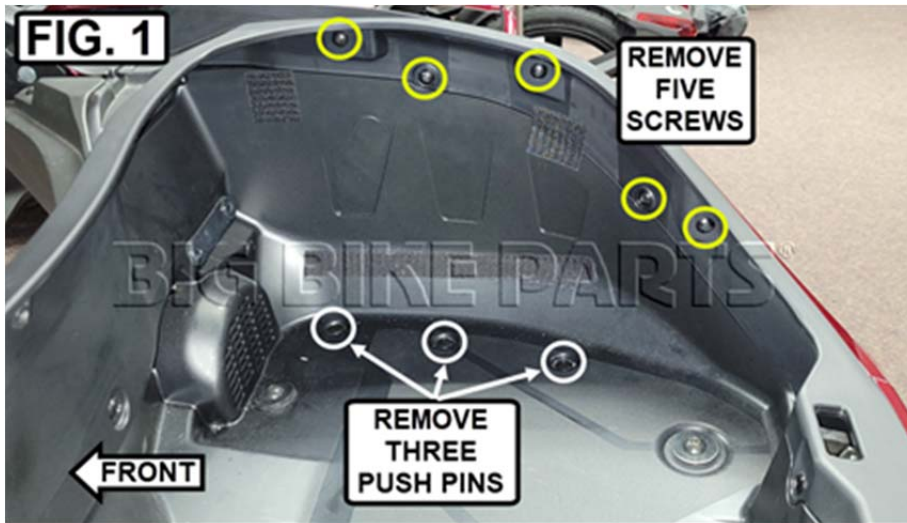

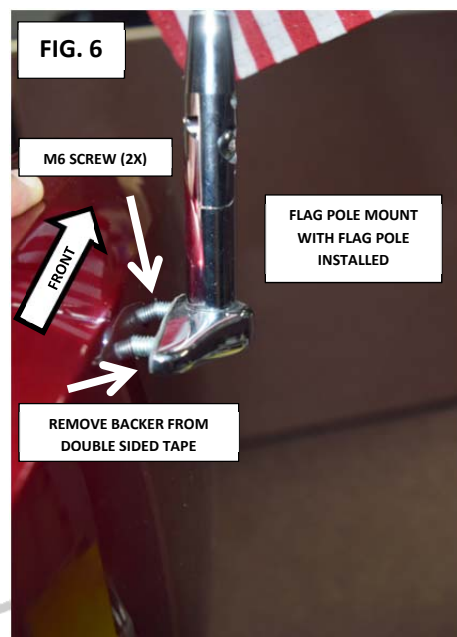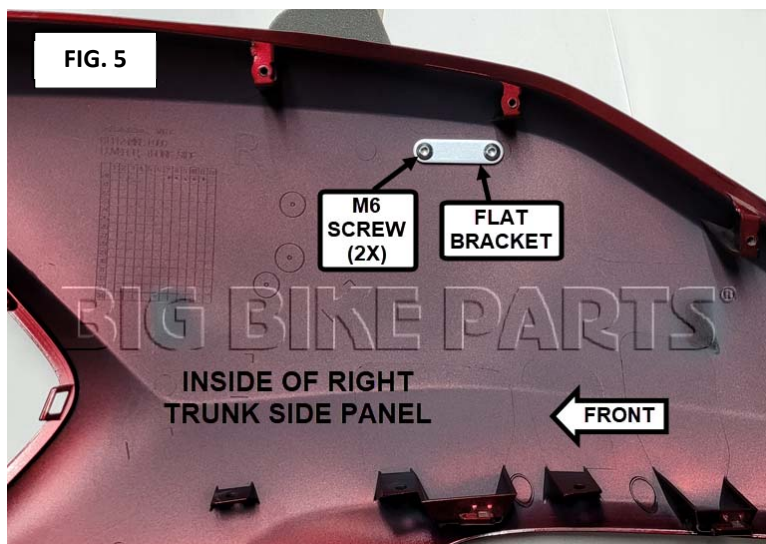

SHOW CHROME

## WARNING

THREADLOCK CAUSES PLASTICS TO CRACK, BREAK OR BECOME BRITTLE. WHEN USING THREADLOCK TO INSTALL HARDWARE WITH PLASTIC COMPONENTS, ONLY APPLY TO METAL COMPONENTS. IT IS CRITICAL THAT ANY EXCESS THREADLOCKER OR SPILLAGE IS CLEANED COMPLETELY FROM PLASTIC COMPONENTS IMMEDIATELY BEFORE DRYING. A DAMP TOWEL OR RAG IS THE BEST WAY TO ACHIEVE THIS. IF EXCESS THREADLOCKER IS NOT CLEANED UP RIGHT AWAY, IT COULD LEAD TO DAMAGED PRODUCTS AND VOID WARRANTY.

## NOTICE

THIS IS AN ADHESIVE BACKED PRODUCT. CAUTION MUST BE TAKEN DURING INSTALLATION TO PROPERLY POSITION FOR ONE TIME PLACEMENT. REPEAT TRIALS WILL RESULT IN FAILURE OF THE ADHESIVE.

## NOTICE

IGNORING THE CONTENTS OF THESE INSTRUCTIONS MAY AFFECT THE PRODUCT PERFORMANCE AND FUNCTIONALITY. NOT FOLLOWING THESE INSTRUCTION MAY CAUSE DAMAGE TO THE PRODUCT OR THE VEHICLE TO WHICH IT IS BEING ATTACHED.