

Copyright© 2014 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

PART NO. 91-306

TOUR LUGGAGE RACK

HARLEY-DAVIDSON TOUR PACKS

8/12/2014

TOOLS NEEDED:	MASKING TAPE	PENCIL/MARKER	DRILL	5/16" (8MM) DRILL BIT	10MM WRENCH
	TAPE MEASURE	THREAD LOCKING COMPOUND			

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.

INSTALLATION:

1. CLEAN ALL DIRT AND DEBRIS FROM THE LID OF THE TOUR PACK.
2. USING A TAPE MEASURE FIND THE CENTER OF THE TRUNK LID FROM RIGHT TO LEFT AND MARK IT WITH A SMALL PIECE OF MASKING TAPE. SEE FIG. 1.
3. CUT FOUR PIECES OF MASKING TAPE ABOUT 1-1/2 TO 2 INCHES SQUARE.
4. TAKE THE RACK FROM THE PACKAGE LEAVING THE PROTECTIVE RUBBER COVERS ON THE LEGS AND PLACE IT ON THE TRUNK LID. SEE FIG. 2.
5. USE THE TAPE MEASURE AND CENTER THE RACK RIGHT TO LEFT ON THE TRUNK LID.
6. ONCE YOU HAVE IT POSITIONED AS YOU WANT IT LIFT UP ONE SIDE AT A TIME AND PLACE THE MASKING TAPE UNDER EACH LEG OF THE RACK. SEE FIG. 2.
7. USING A PENCIL OR MARKER DRAW A CIRCLE AROUND EACH LEG OF THE RACK BEING CAREFUL NOT TO MOVE IT. SEE FIG. 3
8. REMOVE THE RACK AND WITH YOUR PENCIL/MARKER DRAW AN "X" INSIDE THE CIRCLE TO FIND THE CENTER. SEE FIG. 4
9. USING A DRILL AND A 5/16" (8MM) DRILL BIT MAKE A HOLE THROUGH THE LID AT THE INTERSECTION IN EACH CIRCLE. SEE FIG. 4.
10. REMOVE THE MASKING TAPE FROM THE TRUNK LID AND CLEAN THE LID AGAIN. ALSO REMOVE ANY SHARP EDGES OR LOOSE SHAVINGS ON THE HOLES.
11. LOOSELY INSTALL THE RACK ON THE TRUNK LID WITH THE HARDWARE IN THE ORDER SHOWN IN FIG. 5.
12. CHECK TO MAKE SURE THE RACK WILL SIT PROPERLY ON THE LID WITH THE BOLT LOOSELY INSTALLED.
13. APPLY A SMALL AMOUNT OF THREAD LOCKING COMPOUND TO EACH BOLT AND CAREFULLY TIGHTEN.
14. BE VERY CAREFUL NOT TO OVER TIGHTEN THE BOLTS.
15. LET BIKE SIT FOR 24 HOURS BEFORE USING.

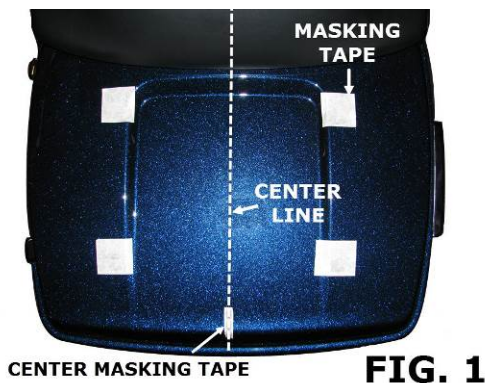


FIG. 1



FIG. 2

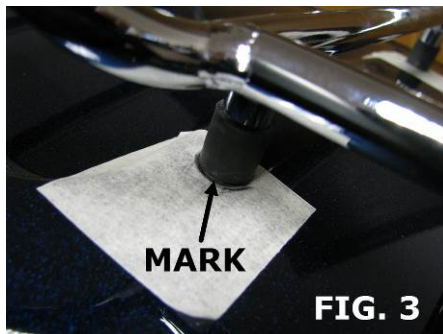


FIG. 3

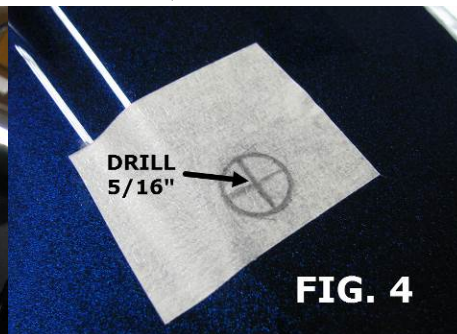


FIG. 4



FIG. 5

Scan code with your
smartphone to view
video

