

Copyright © 2021 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

PART NO. 41-419

RADIATOR GRILLE

FITMENT: CAN-AM RYKER 2019-NEWER

1/27/2022


TOOLS NEEDED: T30 TORX



10MM WRENCH

4MM ALLEN WRENCH

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.**ESTIMATED INSTALLATION TIME: 30 TO 45 MIN.****INSTALLATION:**

1. REMOVE THE HOOD BY LIFTING THE TWO LOCKING TABS (ONE ON EACH SIDE) AND SLIDING THE HOOD FORWARD (FIG. 1). SET ASIDE FOR NOW.
2. USING A T30 TORX, REMOVE THE TWO OEM SCREWS UNDER THE FRONT FAIRING (FIG. 2) (THESE WILL NOT BE REUSED. **NOTE: IF YOUR RYKER HAS PUSH PINS INSTEAD OF SCREWS, REMOVE THE TWO PUSH PINS (THESE WILL NOT BE REUSED). IF YOU DO NOT HAVE PUSH PINS, SKIP STEP 2A.**
- 2A. PULL THE FRONT FAIRING FORWARD SLIGHTLY AND INSTALL THE TWO CLIP NUTS SUPPLIED IN THE KIT AS SHOWN IN FIG. 2A.
3. STARTING ON THE LEFT SIDE, ROLL UP THE END OF THE FRONT FAIRING EXTENSION TO RELEASE THE REAR RETAINING TAB (FIG. 3). (ALSO SHOWN IN OWNERS MANUAL)
4. SLIDE THE END OF THE FRONT FAIRING EXTENSION DOWN AND FORWARD TO RELEASE THE TABS.
5. REPEAT STEP 3 ON THE RIGHT SIDE.
6. SLIDE THE FRONT FAIRING FORWARD TO REMOVE IT. SET ASIDE FOR NOW.
7. USING A 10MM WRENCH, REMOVE THE TWO BOLTS SHOWN IN FIG. 4. THESE WILL BE RE-USED.
8. REMOVE THE RADIATOR GRILLE FROM THE PACKAGE AND PLACE IN THE FRONT OF THE RADIATOR (FIG. 5) AND REINSTALL THE TWO BOLTS FROM STEP 5 (FIG. 5).
9. REPEAT STEPS 1 THROUGH 5 IN REVERSE ORDER TO REINSTALL THE BIKE PANELS. (**NOTE: USE THE M6X30MM LONG BUTTON HEAD CAP SCREWS SUPPLIED IN THE KIT IN THE TWO HOLES UNDER THE FRONT FAIRING.**)

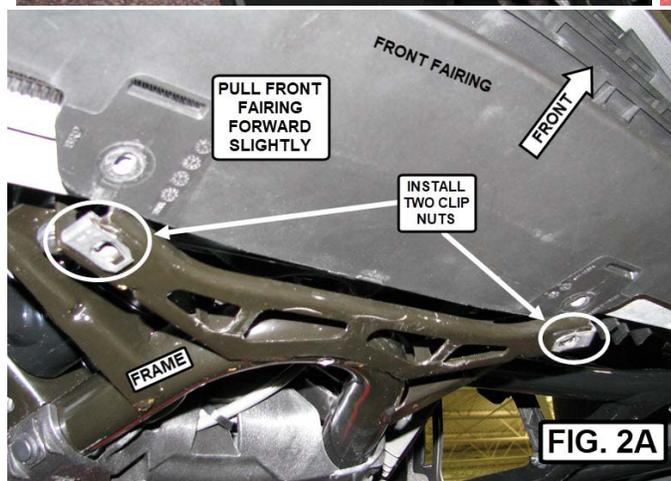

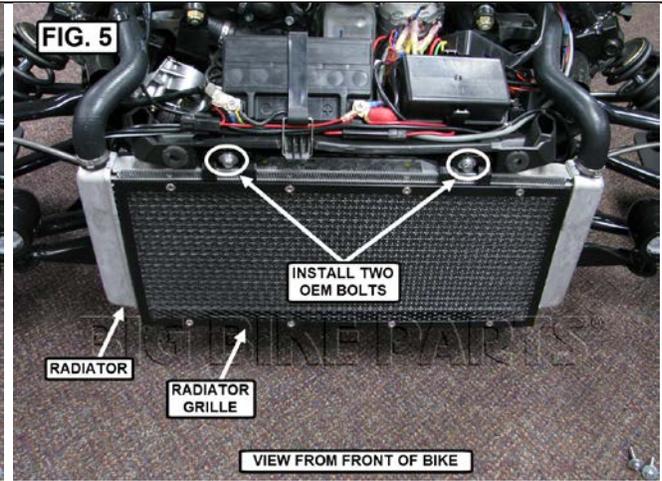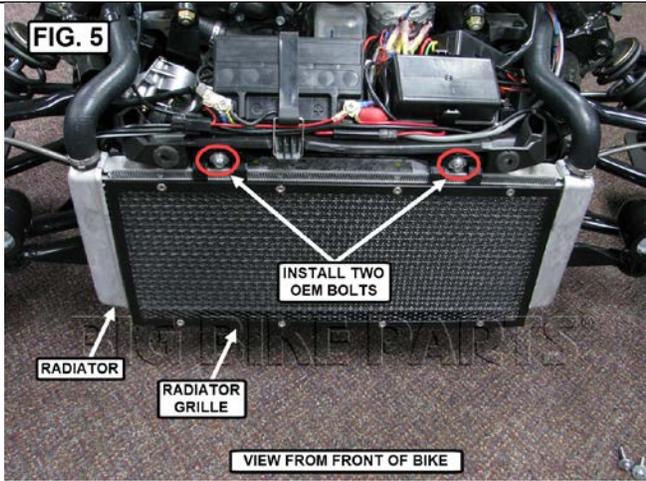

NOTICE

THIS SET CONTAINS EXTRA
HARDWARE ITEMS THAT WILL
NOT BE USED FOR THIS
INSTALLATION

NOTICE

IGNORING THE CONTENTS OF THESE
INSTRUCTIONS MAY AFFECT THE PRODUCT
PERFORMANCE AND FUNCTIONALITY. NOT
FOLLOWING THESE INSTRUCTION MAY CAUSE
DAMAGE TO THE PRODUCT OR THE VEHICLE
TO WHICH IT IS BEING ATTACHED.